


VACUFLEX® PU 600 E ECO

Light weight and very flexible spiral hose made of polyurethane

- Applications** extraction systems, dust extraction, extractions arms, venting, textile fiber extraction
- Structure** TPU / Polyester-Polyurethane, uncolored, transparent, steel wire / spring steel wire / not coated / copper plated
- Temperature** -40°C up to 90°C, short term up to 125°C
- Properties** light weight, very good flexibility, very good abrasion resistance, good tensile strength, ultimate elongation, good ozone- & UV-resistance

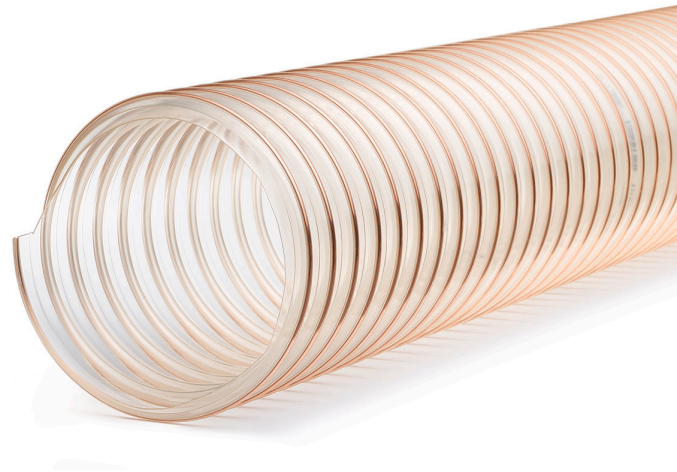

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Weight (kg/m)	Length (m)	Article Number
32	36,00	0,60	32	0,70	0,35	0,21400	20	7-1500-032-00/998
40	45,00	0,60	40	0,70	0,35	0,22800	20	7-1500-040-00/998
50	55,00	0,60	50	0,70	0,35	0,28200	20	7-1500-050-00/998
60	65,00	0,60	60	0,60	0,25	0,38500	20	7-1500-060-00/998
70	75,00	0,60	70	0,60	0,25	0,44000	20	7-1500-070-00/998
75	80,00	0,60	75	0,60	0,25	0,47100	20	7-1500-075-00/998
80	85,00	0,60	80	0,40	0,15	0,49200	20	7-1500-080-00/998
90	95,00	0,60	90	0,40	0,15	0,55300	20	7-1500-090-00/998
100	106,00	0,60	100	0,40	0,15	0,63800	15	7-1500-100-00/998
110	116,00	0,60	110	0,30	0,10	0,62400	15	7-1500-110-00/998
120	126,00	0,60	120	0,30	0,10	0,68000	15	7-1500-120-00/998
125	131,00	0,60	125	0,30	0,10	0,80100	15	7-1500-125-00/998
130	136,00	0,60	130	0,30	0,10	0,83300	15	7-1500-130-00/998
140	146,00	0,60	140	0,30	0,10	0,79200	15	7-1500-140-00/998
150	156,00	0,60	150	0,30	0,10	0,84800	15	7-1500-150-00/998
160	166,00	0,60	160	0,20	0,05	0,90300	15	7-1500-160-00/998
180	186,00	0,60	180	0,20	0,05	1,01500	15	7-1500-180-00/998
200	207,00	0,60	200	0,20	0,05	1,17000	10	7-1500-200-00/998
250	257,00	0,60	250	0,10	0,02	1,45900	10	7-1500-250-00/998
300	307,00	0,60	300	0,10	0,02	1,85600	10	7-1500-300-00/998